


Manual Instruction

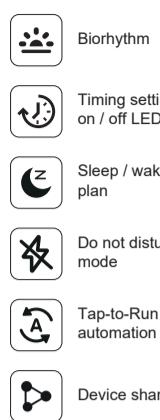


Zigbee 3.0 GU10 RGB+CCT LED Spotlight

Model No.: LM080

GU10 RGB+CCT LED Spotlight


Model No.: LM080
Input Voltage: AC100~240V 50/60Hz
Power: 4W
Working Temperature: -10~40°C
Rated Current: 0.07A
Color Temperature: 2700K~6500K
Luminous Flux: 300LM~320LM
Luminous Efficiency: 80LM/W
CRI: >80
Lifespan: 50000 hours
Beam Angle: 30°
Control Distance: 30m
Product Weight: 42g

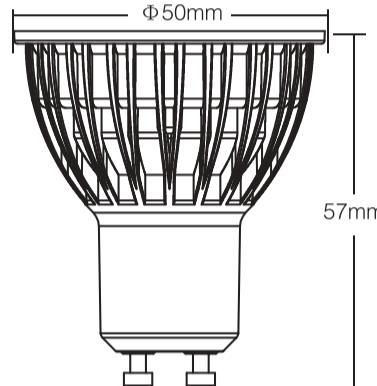

1. Features

- RGB+CCT 16 Millions of colors to choose
- Color temperature 2700~6500K
- Dim brightness / Saturation
- Music Rhythm function
- Work with Philip Hue APP (Philip Hue Bridge is needed)
- Smart phone APP control (Tuya Zigbee gateway is needed)
- Support third party voice control (Tuya Zigbee gateway is needed)

Second, Press "Add new devices" on the APP, it will automatically find the zigbee device, then complete the linking. Added device will be displayed on the homepage after added successfully, then Click device you want to control to enter the control interface.

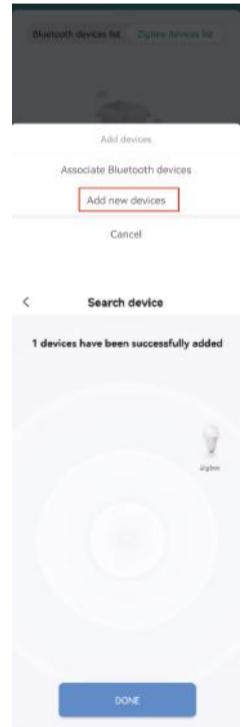


Click [Color], you can control color change, brightness, saturation and save colors you like.



(2). Click [Scene] on the bottom, you can get into Scene control page.



(3). Click [Music], you can come into Music rhythm control page.

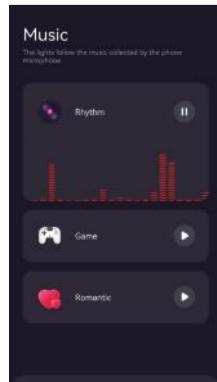


3. APP Control

(1). When you come into control page, Click [dimmer] on the bottom left corner, then click [white], you can control the white light with color temperature, brightness, and save the white light you like.



2. Instructions

Put the light bulb in the suitable lighting fixture.

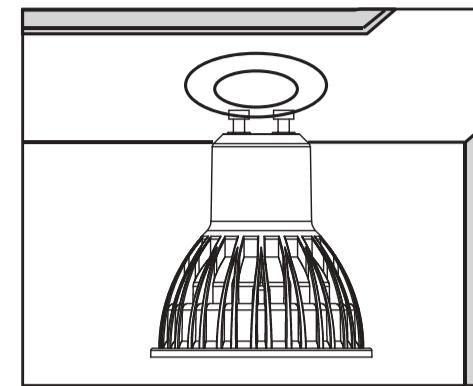

Zigbee 3.0 APP Control Instruction

1. Download and install [Tuya Smart] APP or [Smart Life] APP

Search for [Smart Life] in Apple or Google store or scan following QR code to download and install the app.
Please click "Register" button to create account while using it in the first time, Log in directly if you already had account.



2. Connect to Smartphone


You must link the Tuya Zigbee 3.0 Gateway first to the smartphone, then add the zigbee spotlight to zigbee gateway for smartphone control.

(1). How to connect zigbee gateway to smartphone. (Note: All Tuya Zigbee 3.0 gateway in market can works on our Zigbee product; Here we use our Zigbee 3.0 gateway for example).

First, Power the zigbee gateway, and long press the "SET" button until the red indicating lamp blinking.



Second, when the red indicating lamp blink, open the Smart Life APP, and press "Add Device". It will discover the new device automatically, then Press "Add" to complete the linking.

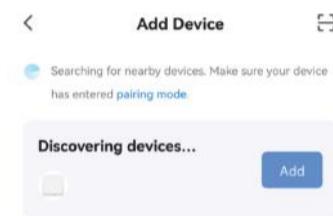

(2). Add the Zigbee spotlight to the linked zigbee gateway.

First, power ON-OFF 3 times(ON-OFF-ON-OFF-ON) when the white light blinking 3 times means the spotlight come into smart link mode. (Note: when the spotlight on the smart link mode, please finish the linking within 3 minutes, after 3 minutes the spotlight will stop smart link mode, you need to do the above steps again).



(5). Device name editing, Third-party Control, Device Sharing and Group Control.


(5.1) Click [...] on the top right corner of control page to come into extra function.

(5.2). Click icon under third-party control to view detailed description of third-party control

(5.3). Click [Share Device] to share the device to family and friends.


Note: to share device, you need to create a home first, then add members in to this home. Please read 6th instructions for how to make home management.

(5.4). Click "Create Group" and follow APP prompt after setting is completed, the devices can be controlled by group.

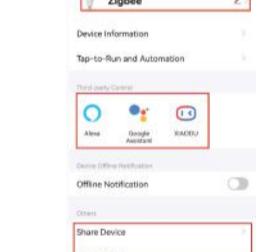

(5). How to make Home Management for Device Sharing.

(6.1) Click [...] on the home page control interface, then click [Home Management] to enter Home management making.

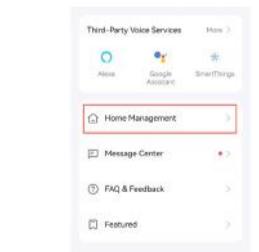

(6.2) Click [Create a home] to complete home management, then you can add members on the home, and share device to your home number.



Note: Our Zigbee 3.0 downlight also works on Philips Hue Bridge and Samsung Smartthings gateway for smartphone controlling.