

Manual Instruction

20/30/50/100W Zigbee 3.0 RGB+CCT LED Floodlight

Model No.: FL02Z/FL03Z/FL04Z/FL05Z

1. Product Introduction


This product is made of a aluminium alloy bottom case and imported material covers with fashionable appearance, waterproof and dustproof, energy saving and environmental protecting, etc features. Widely used on park, apartment, gardens and street, etc.

- RGB+CCT 16 Millions of colors to choose
- 2.4G RF wireless transmission technology
- Dimmable Saturation control
- 100m super long distance signal transmitting & Mode Synchronization (Except 10W)
- Color temperature 2700K-6500K
- Remote control Control distance 30m
- Beam Angle 110°
- Smart phone APP control (Tuya Zigbee gateway is needed)
- IP65 Waterproof and dustproof grade IP65
- Support third party voice control (Tuya Zigbee gateway is needed)

2. Technical Parameters


FL02Z (20W)

Input Voltage: AC100~240V 50/60Hz
Power: 20W
Working Temperature: -20~45°C
Color Temperature: 2700K~6500K
Luminous Flux: 2200LM
Light Efficiency: 110LM/W
Standby Power Consumption: 0.6W
CRI: >80
PF: >0.9
Beam Angle: 110°
IP Rate: IP65
RF: 2.4GHz
Transmitting power: 6dBm
Control Distance: 30m
Lifespan: 50000 hours




FL03Z (30W)

Input Voltage: AC100~240V 50/60Hz
Power: 30W
Working Temperature: -20~45°C
Color Temperature: 2700K~6500K
Luminous Flux: 3300LM
Light Efficiency: 110LM/W
Standby Power Consumption: 0.6W
CRI: >80
PF: >0.9
Beam Angle: 110°
IP Rate: IP65
RF: 2.4GHz
Transmitting power: 6dBm
Control Distance: 30m
Lifespan: 50000 hours



FL04Z (50W)


Input Voltage: AC100~240V 50/60Hz
Power: 50W
Working Temperature: -20~45°C
Color Temperature: 2700K~6500K
Luminous Flux: 5500LM
Light Efficiency: 110LM/W
Standby Power Consumption: 0.7W
CRI: >80 PF: >0.9
Beam Angle: 110°
IP Rate: IP65
RF: 2.4GHz
Transmitting power: 6dBm
Control Distance: 30m
Lifespan: 50000 hours



3. Dynamic Mode Sheet

Number	Dynamic Mode	Brightness / Saturation / Speed
1	Riotous Profusion	Adjustable
2	Blue Sky	
3	Gorgeous Color	
4	Ocean	
5	Dreamlike	
6	Christmas	
7	Forest	
8	Birthday	
9	Blomming	

4. Connection Diagram

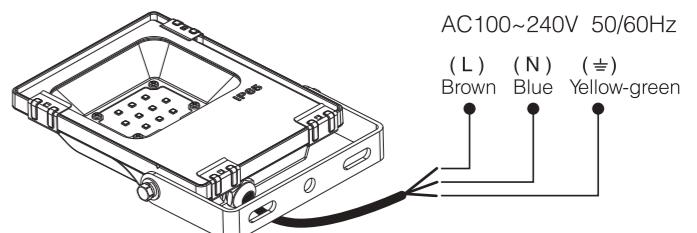


5. Super Long Distance Signal transmitting

One lighting fixture can transmit the signals from the remote control to another lighting fixture within 100m, as long as there is a lighting fixture within 30m, the remote control distance can be limitless.

6. Modes synchronization

Different lighting fixture can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and within 100m distance.

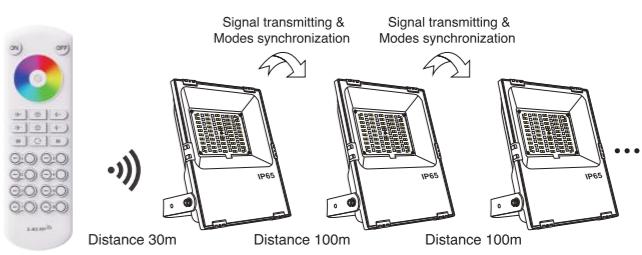

7. Compatible Remote Control

Compatible with these remote controls (Purchased separately)



Linking&Unlinking

Remark: The light can be working after linking with the remote controller.

Linking Instructions



If the light not blink slowly, the linking failed. Pls switch off the light again, and follow the above steps again.

Unlinking Instructions



If the light not blink quickly, the unlink failed, pls switch off the light again, and follow the above steps to unlink again.

! NOTE:

Lighting can be working after linking with remote; for more details, pls read the remote instruction.

8. Attention

1. When install the lighting fixtures, pls switch off the power to make sure the safety.
2. The working power is high voltage alternating current, so it must be far away from people and must with ground connection.
3. As the power is large, user must choose suitable power cable when connecting.
4. Non-professional user cannot dismantle the lighting fixtures directly, otherwise, it may cause fire and electric shock.
5. Please do not use lighting fixtures around the mental area and high magnetic field, otherwise, it will badly affect the control distance.
6. Users must be correct, strict and solid to install the lighting fixtures; do not use the lighting fixtures on strenuous vibration area.



Made in China

Zigbee 3.0 APP Control Instruction

1. Download and install [Tuya Smart] APP or [Smart Life] APP

Search for [Smart Life] in Apple or Google store or scan following QR code to download and install the app.

Please click "Register" button to create account while using it in the first time, Log in directly if you already had account.



2. Connect to Smartphone


You must link the Tuya Zigbee 3.0 Gateway first to the smartphone, then add the Zigbee floodlight to zigbee gateway for smartphone control.

(1). How to connect zigbee gateway to smartphone.(Note: All Tuya Zigbee 3.0 gateway in market can works on our Zigbee floodlight controller; Here we use our Zigbee 3.0 gateway for example).

First, Power the zigbee gateway, and long press the "SET" button until the red indicating lamp blinking.



Second, when the red indicating lamp blink, open the Smart Life APP, and press "Add Device". It will discover the new device automatically, then Press "Add" to complete the linking.

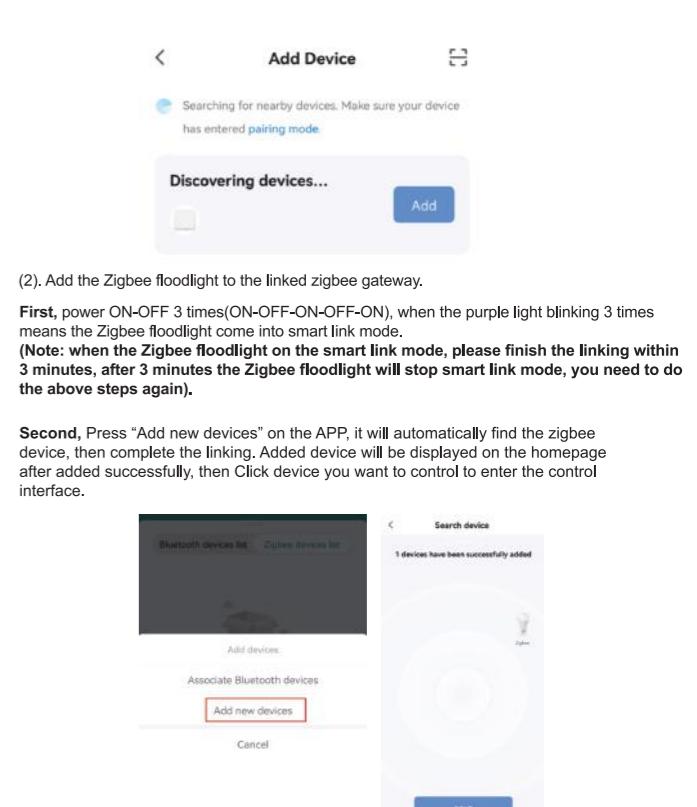

Note: Our Zigbee floodlight also works on Philips Hue Bridge and Samsung Smarthings gateway for smartphone controlling.